Pro2 Build Plate Installation Instruction

STEP 1: Remove original Build Plate


Loosen the two thumb screws in front of the Build Plate with anti-clockwise rotation.



• Take Build Plate off by holding the protective cover.

STEP 2: Install new Build Plate.

Slide the new Build Plate onto the Z platform. Face the surface with Raise3D logo up.

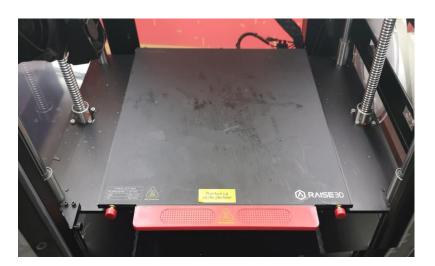

• Tighten the thumb screws to fix the Build Plate. Confirm whether the pate can hardly be moved before shooting a print.

